TRADE RANGE



TRADESMAN

This lace up safety boot provides additional ankle stability at an attractive price point, making it ideal for apprentices and part timers. The TPU outsole provides improved resistance to hydrolysis, microbial attack, oils, acids and organic fats compared to dual density PU soles.



SAFETY SYSTEMS



Complies with Australian/New Zealand (AS/NZ S2210.3), European (EN-ISO 20345: 2011) and American standards (ASTM F2413-11).

MAEK

Sole slip resistant to soap (SLS) on ceramic tiles and glyceryl on steel plate.

TPU sole that is hard wearing and highly

150°cHeatResistant

resistant to hydrolysis, microbial attack, oils, acids and organic fats.

fueloil **RESIST**

Sole resists breakdown to fuel oil.

ANTI-STATIC

Minimises static electricity build up for safety in volatile environments.

H₂ORESISTANT

Footwear designed to shed water.







HAZARD SOLUTION GUIDE


COMBUSTIBLE MATERIALS


 ANTI-STATIC certified footwear minimises static electricity build-up for safety in volatile environments.



FIT GRID

SOLE SELECTION GRID

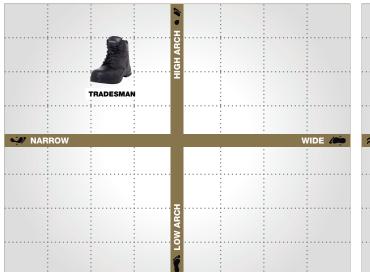



MACKBOOTS.COM.AU | 1300 350 216

Mack Footwear is sold under licence from Mack Trucks, Inc. All rights reserved. *Weight disclaimer. Footwear weights are based on a men's UK8 for a single shoe or boot and a ladies UK10 for women's shoes. Due to the nature of manufacturing there will be subtle variation between pairs. Disclaimer: Every reasonable effort has been made to ensure the accuracy of the Product information in this document. This document must not be regarded as an infallible guide. **Mack Boots™** accepts no responsibility in this regard. As product details may change from time to time please contact **Mack Boots™** to gain the latest information.



AS/NZS 2210 Australian /New Zealand Standards EN - ISO 20345 European Standards ASTM F2413 American Standards